



RECOVX

RESCUE SYSTEMS

GETTING THE JOB
DONE,
ALL DAY, EVERY DAY.

RecovX Battery Powered Tools

iC86 Battery Cutter

Cutter iC86	
Length	32.9 inches (836 mm)
Width	8.7 inches (221 mm)
Height	11.6 inches (294 mm)
Cutting Force	867 KN (88.4 t)
Weight (ready to use)	56.6 lbs (25.6 kg)
Cutter Opening	5.8 inches (147 mm)
Cutter Rating	A7/B8/C7/D9/E9/F4

iC118 Battery Cutter

Cutter iC118	
Length	33.7 inches (856 mm)
Width	8.7 inches (221 mm)
Height	11.6 inches (294 mm)
Cutting Force	1183 KN (120.6 t)
Weight (ready to use)	57.3 lbs (26.0 kg)
Cutter Opening	8.2 inches (208 mm)
Cutter Rating	A8/B9/C7/D9/E9/F4



- Blade and center bolt design allow access to the difficult cuts
- Rotating handle allows tool to be repositioned with minimal effort

RecovX Battery Powered Spreader

iS128 Battery Spreader

- This 28" spreader is more compact allowing access to tighter areas.
- A powerful multi-use spreader with RGrips™ for a reliable grip that won't rip sheet metal
- Extended Reach Tips (ERT) increase the spread an additional 3.3" without significant loss of power

Spreader iS128	
Length	35.9 inches (912 mm)
Width	11.1 inches (282 mm)
Height	11.6 inches (294 mm)
Weight (excl. battery)	23.4 kg
Weight (ready to use)	24.5 kg
Max Spreading Distance	28.2 inches (711 mm)
Max Spreading Distance (with optional ERT tips)	31.5 inches (794 mm)
Squeezing Force	128.1 kN (12.9 t)
Pulling Distance	453 mm (17.8 in)
Max Spreading Force	386 kN (39.4 t)
Highest Pulling Force (HPF)	67.2 kN (6.8 t)
EN13204	Compliant


iS97 Battery Spreader

- A powerful multi-use spreader with RGrips™ for a reliable grip that won't rip sheet metal
- Extended Reach Tips (ERT) increase the spread an additional 3.3" without significant loss of power
- RGrips™ and ERT's utilize a push button release, so they're easy to install or remove, even with gloved hands

ION Spreader iS97	
Length	38.1 inches (968 mm)
Width	11.1 inches (282 mm)
Height	11.6 inches (294 mm)
Weight (excl. battery)	24.8 kg
Weight (ready to use)	25.9 kg
Max Spreading Distance	32 inches (812 mm)
Max Spreading Distance (with optional ERT tips)	35.3 inches (895.7 mm)
Squeezing Force	97.2 kN (10.1 t)
Pulling Distance	524 mm (20.6 in)
Max Spreading Force	311.7 kN (30.9 t)
Highest Pulling Force (HPF)	51.1 kN (5.3 t)
EN 13204	Compliant



RecovX Battery Powered Combi-Tool

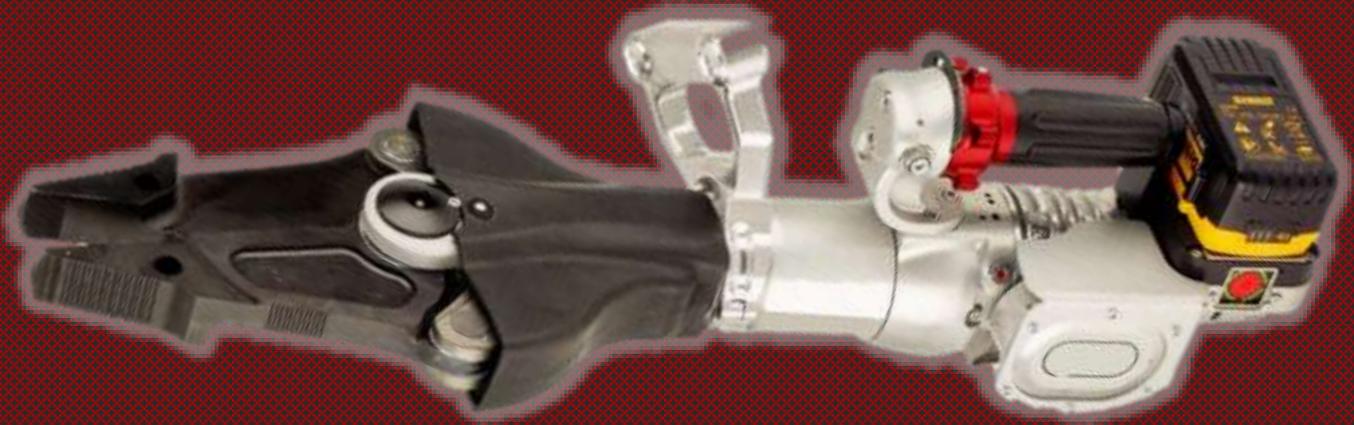

Combi Tool iCT120

Length with Spreading Tips	36.0 inches (915 mm)
Length without Spreading Tips	34.8 inches (885 mm)
Width	8.7 inches (221 mm)
Height	11.6 inches (294 mm)
Weight (excl. battery)	23.8 kg
Weight (ready to use)	24.9 kg
Max Spreading Distance	16.1 inches (406 mm)
Cutting Force	1204 kN (120.7 t)
EN13204	Compliant
Max Spreading Force	1,423 kN (145.1 t)
Cutter Opening	13.8 inches (351 mm)
Cutter Rating	A7/B8/C7/D9/E8/F5

iCT120 Compact Battery Combi Cutter/Spreader

- A versatile tool for engines, rescue trucks, or ambulances
- Rotating handle allows tool to be repositioned with minimal effort

RecovX Battery Powered RAM



iTR215 RAM

- Highest pushing force available in a battery powered ram
- Extensions available for a maximum extended length of 49.6"

ION Ram iTR215	
Length	17.8 inches (452 mm)
Width	7.3 inches (185 mm)
Height	11.4 inches (290 mm)
Weight (excl. battery)	36.8 lbs (16.7 kg)
Length Retracted	11.4 inches (290 mm)
Length Extended	22.6 inches (574 mm)
Stroke: Piston 1	6.3 inches (160 mm)
Stroke: Piston 2	4.9 inches (124 mm)
Stroke: Overall	11.2 inches (284 mm)
Extensions Lengths Available	10, 18 and 27 inch (254, 457 and 686 mm)
Max Extended Length with Extensions	49.6 inches (1260 mm)
Highest Spreading Force (HSF) Piston 1	215.1 kN
Lowest Spreading Force (LSF) Piston 2	76.4 kN

RecovX Hydraulic Tools

C138 COMBI TOOL

- Removable tips make this “first on scene” tool a great option
- Useful to spread, cut and, “pop” doors

Combi Tool C138 EN 13204 Compliant	
Length with Spreading Tips	34.9 inches (887 mm)
Width	8.7 inches (221 mm)
Height	10.2 inches (259 mm)
Weight (with Standard Quick Couplers)	18.9 kg
Weight (with Mono Coupler)	20 kg
Max Spreading Distance	396 mm
Highest Pulling Force	125.8 kN (12.2 t)
Cutting Force	1384 kN (12.9 t)
Max Spreading Force	1,423 kN
Cutter Opening	13.8 inches (351 mm)
Cutter Rating	A7/B8/C7/D9/E8/F5
Pressure Rating	480 bar

TR200 RAM

- Total lifting capacity 11.2 tons
- 50" Telescoping Ram with all-metal body

Ram TR200	
Length Retracted	21.9 inches (555 mm)
Length Extended	50.8 inches (1,289 mm)
Weight	38.4 lbs (17.4 kg)
Stroke: Piston 1	15.0 inches (381 mm)
Stroke: Piston 2	13.6 inches (346 mm)
Stroke: Overall	28.6 inches (727 mm)
Highest Spreading Force (HSF) Piston 1	206.0 kN
Highest Spreading Force (HSF) Piston 2	96.0 kN

S198 Hydraulic Spreader

- This 28" spreader is compact allowing access to tighter areas.
- A powerful multi-use spreader with Tips for a reliable grip that won't rip sheet metal • Extended Reach Tips (ERT) increase the spread an additional 3.3" without significant loss of power.

Spreader S198 <i>EN 13204 Compliant</i>	
Length	34.6 inches (879 mm)
Width	11.1 inches (282 mm)
Height	11.6 inches (295 mm)
Weight (with Standard Quick Couplers)	45.0 lbs (20.4 kg)
Weight (with Mono Coupler)	45.4 lbs (20.6 kg)
Max Spreading Distance	28.2 inches (716 mm)
Max Spreading Distance (with optional ERT tips)	31.5 inches (799 mm)
Max Spreading Force	1980.1 kN
Max Pulling Force	257.2 kN
Rated Input Pressure	480 bar
Accessories	Pulling Chains etc.

C138 Large Blade Battery Cutter

- Blade and center bolt design allow access to the difficult cuts.
- High Cutting Force with Maximum Cutting force of 1420 KN.
- Rotating handle allows tool to be repositioned with minimal effort.

Cutter C138 <i>EN 13204 Compliant</i>	
Length	32.6 inches (827 mm)
Width	8.7 inches (221 mm)
Height	10.2 inches (259 mm)
Weight (with Standard Quick Couplers)	46.2 lbs (21.0 kg)
Weight (with Mono Couplers)	46.6 lbs (21.1 kg)
Cutter Opening	7.9 inches (201 mm)
Cutter Rating	A8/B9/C7/D9/E9/F4
Rated Input Pressure	480 bar

RecovX Accessories




ERT



RGrips



Mono-Coupling Hoses

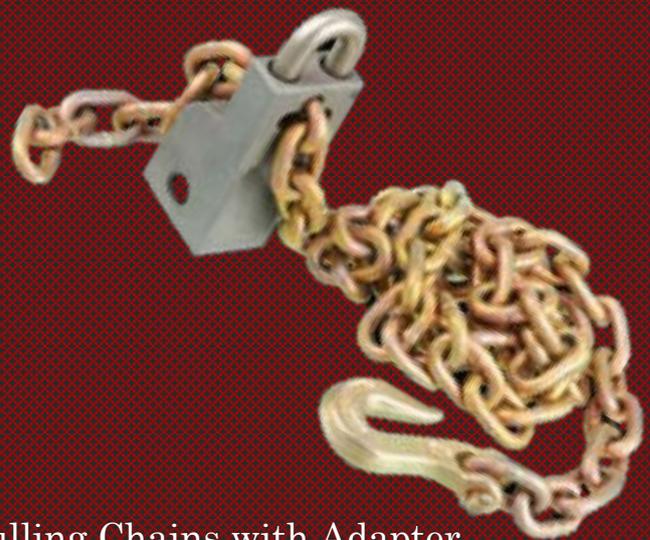

Pulling Chains with Adapter